

xMount

Holds your iPad!

xMount@Stand Energy

Operating instructions



xMount@Stand Energy

Prospekthalter




Remove the floor stand from the packaging. Now fasten the holder on the floor stand using the two screws screwed in. Remove part 1, push your iPad into the stand with the home button downwards, it is now hidden by the Anti App Stop. Should this not be requested, please refer to the instructions about conversion of the mount on the next page.

For the loading unit, please use the power supply as well as the dock cable included in the scope of delivery of the iPad.

- For adjusting the ball joint according to your request
- remove the centred cover of the holder.
- remove the M 4 cap nuts on the back side.
- remove all cross-head screws.
- remove the holder with parts 2 and 3 now.
- remove the locking plate by switching it.
- Underneath, you will find the adjusting screw.
- During assembly, please pay attention to the optimal choice of the screws.
- Screw M 4x20 screws in the threads top right and bottom left, M 4x10 screws top left and bottom right.
- Screw the cap nuts in place on the back side of the holder now.
- Now push the iPad into the holder with the home button downwards.

Conversion Anti App Stop

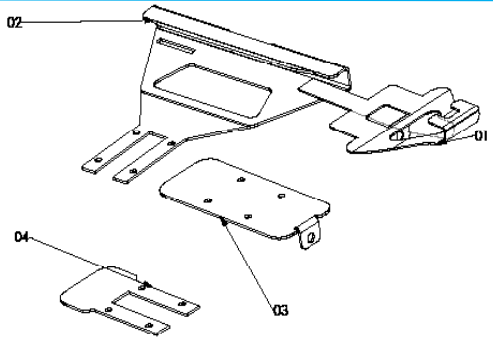

- Take the iPad out of the holder.
- Remove the centred cover of the holder.
- Remove the M 4 cap nuts on the back side.
- Remove all cross-head screws.
- Remove the holder with parts 2 and 3 now.
- Now exchange part 2 for part 4 and reassemble the parts in the sequence xMount Basis part 2 part 4.
- In this process, please pay attention to the optimal choice of the screws. Screw M 4x20 screws in the threads top right and bottom left, M 4x10 screws top left and bottom right.
- Screw the cap nuts in place on the back side of the holder now.
- Now push the iPad into the holder with the home button downwards.
- Now lock it up with part 1 and a qualified lock.

Contact:

Benjamin Hermann Handels UG
Mühlweg 12 c . 61169 Friedberg
+49 (0) 6 031 - 67 28 106
info@xmount.de

www.xmount.de

xMount@Safety instructions

Safety instructions

of Benjamin Hermann Handels UG for iPad holders.

The following safety instructions shall be absolutely observed.

Please only apply this product in its intended manner.

Any use other than for this purpose may particularly involve damages to the product or its environment. A strong solar irradiation may affect the function of the product. For additional technical data and general information please refer to the product on our homepage www.xmount.de

General information

The product must not be used during driving. When fastening the product in the vehicle please ensure the field of view not being restricted and comply with the StvZO (Road Traffic Licensing Regulations) here.

The product is provided for a temperature range between minus ten to plus sixty degrees Celsius. The suction cup mounts are only suitable for a temporary mounting on a smooth and clean surface. Before utilization please make sure the mounting surface is clean and free from grease. Bike mounts have a speed limitation of 20 km/h. Non-observance may cause the mount or the device to be mounted becoming loose and getting damaged. Subsequent damage caused by devices fallen down cannot be excluded. Moreover, your device may probably get scratched on the back side. Please exclusively use the parts delivered for mounting. Never carry any floor stand at the tube since this may involve damages. All screws shall be tightened with not more than 10 newtons. Kindly keep these safety instructions and further documents together with your device. Should you hand over this product to third parties, please also hand over the overall documentation.

Cleaning

For cleaning, please do not apply any cleaning sprays or solutions of any kind that include alcohol or other inflammable liquids.

Repair

Repair work at the product shall be exclusively carried out by professionals. Unauthorized opening and inappropriate repair work may involve considerable danger for the user (particularly the risk of functional disorders, loose parts, fire hazard).

Preventive measures for children

For the avoidance of injuries, please make sure children, particularly infants, do not get in contact with the following devices and objects. Small parts of the device, accumulators, batteries, screws, cables and packaging material (e.g. plastic bags) may be swallowed.

Transport and safekeeping

Please protect the product particularly against shocks, impurities, strong solar irradiation, humidity and electrostatic charge. Do not drop the device and do not expose it to any intense vibrations.

Contact:

www.xmount.de

Benjamin Hermann Handels UG
Mühlweg 12 c . 61169 Friedberg
+49 (0) 6 031 - 67 28 106
info@xmount.de

xMount@Safety instructions

External power supply

For power supply of the product, you are allowed to exclusively use the defined accumulator and the supplied adapter. You will find further information about this in the operating instructions of the product. Please only use adapters and accumulators released for your product. When connecting and disconnecting the cables please observe the information in the operating instructions of the product. Adapters used in vehicles may be exclusively operated under the supervision of adults. If the product is switched on, please do not keep it in an environment with a poor air circulation. Otherwise, this may particularly cause damages to the product or even fire. Please do not keep charging devices, adapters, accumulators and batteries near a source of heat. Excessive heat may cause the charging device and adapter catching fire. Please disconnect them from the power supply if not supervised by adults. Please make sure the contacts of your power socket are clean. Adapters may get very hot. Never hide the ventilation slots of the adapter. Do not use damaged cables, otherwise there is the risk of an electric shock or fire.

Positioning and operation

Mount the product to such an extent that it cannot cause any injury neither in the range of an airbag nor in the event of an accident, particularly not in the impact area of the head or body. Usually, the products are designed for being mounted at the screen, at the air grid or at the headrests. For products with electrical supply please pay attention to the following: Lay the cables in a manner that they do not cause any danger (risk of stumbling) and are not damaged. When connecting the cables please pay attention to the corresponding information in the operating instructions of the product. The assembly of the product and also the assembly of accessory parts must by no means impede the driver during driving the vehicle. Do not operate, mount or adjust this or other products during driving. During driving, please do not reach for or look for objects that have fallen down.

Anti-theft system

The xMount anti-theft system is construed for simple theft (removal). It cannot withstand theft attempts by tools and brute force. For the anti-theft protection, please exclusively use locks of the brand Burgwächter C-Line 220-20 with a diameter of 11 mm in order to avoid the mount sliding on. Moreover, the device comes with an additional cover that is required to be used.

Attention

No liability is assumed for damages resulting from misuse of the product or non-observance of the safety instructions.

Contact:

www.xmount.de

Benjamin Hermann Handels UG
Mühlweg 12 c . 61169 Friedberg
+49 (0) 6 031 - 67 28 106
info@xmount.de